

LMA8 Mic/Line Preamplifier



ROSTEC LMA8

8-channel Professional Mic/Line Preamplifier

Programming of the push-button response time


The IMP and +48V push buttons on the front panel are tactile toggle switches. They can be programmed to 6 different response times: 32 msec, 63 msec, 125 msec, 250 msec, 500 msec or 1 second

The unit is switched into programming mode by holding down the CH8 IMP switch while powering up. The response time is selected by pressing the CH1 to CH6 IMP switches. The chosen setting is immediately saved into memory. No need to do anything special.


The graphical representation illustrates the procedure.

LMA8 Mic/Line Preamp


Step 1: Turn the unit off

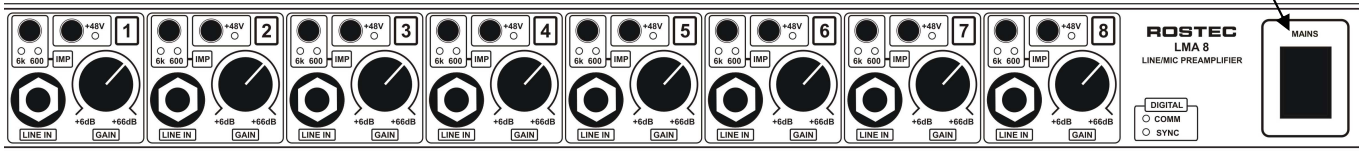

Step 2: Hold down CH8 IMP switch while turning the unit on.

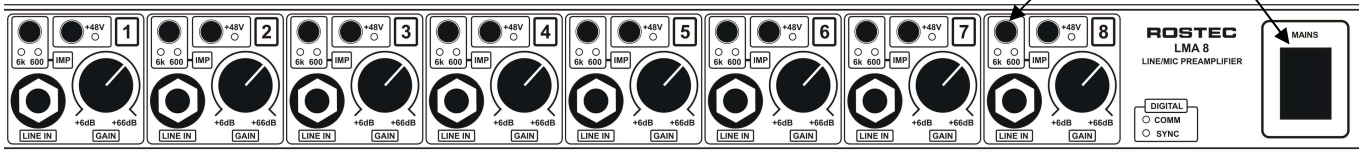


Step 3: The 6k IMP LEDs on channels 1 to 6 will flash 3 times, indicating that the unit is in programming mode

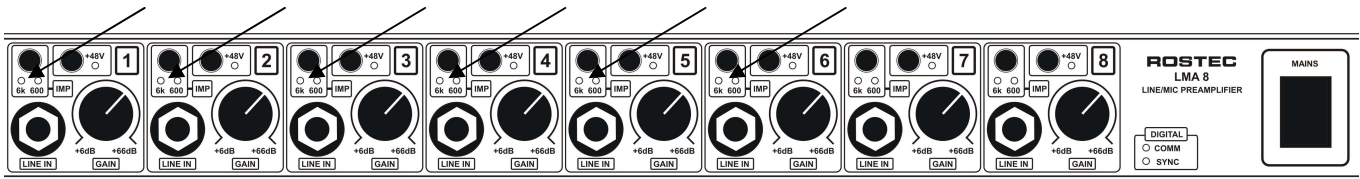

Step 4: Press the IMP switch on channels 1 to 6 to select the response time. The 6k IMP LED will light up indicating the selected response time. The setting is immediately saved into memory.

CH1: 32 msec, CH2: 63 msec, CH3: 125 msec, CH4: 250 msec, CH5: 500 msec, CH6: 1 sec

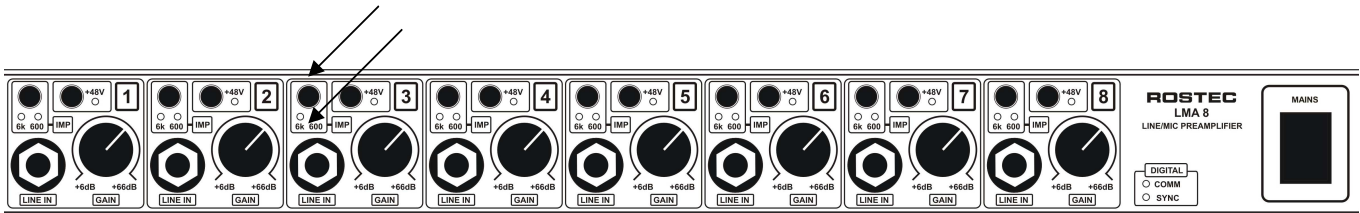

Step 5: There are 3 ways to exit. Press CH7 IMP switch, turn the power off or wait 15 seconds for automatic exit.

